

NOTES:


- SUITABLE FOR 230µm HCS FIBER WITH 2.2mm JACKET

INSTRUCTIONS FOR BC04265-10:

- STRIP 16mm OF JACKET FROM FIBER.
- STRIP 7.7mm OF BUFFER FROM FIBER.
- SLIP BOOT OVER CABLE JACKET.
- APPLY EPOXY TO BARE FIBER AND INSERT INTO FERRULE; ROTATE FIBER DURING INSERTION TO EVENLY DISTRIBUTE EPOXY.
- CRIMP CONNECTOR TO CABLE JACKET USING 2.5mm [.10"] HEX CRIMP.
- SLIP BOOT DOWN OVER CONNECTOR. POLISH AFTER EPOXY HAS CURED FULLY.


RECOMMENDED EPOXY:
EPO-TEK 301

CRIMP TOOL FOR 2.2mm JACKETED CABLE:
IF 370046
USE 2.5 [.10"] HEX CRIMP

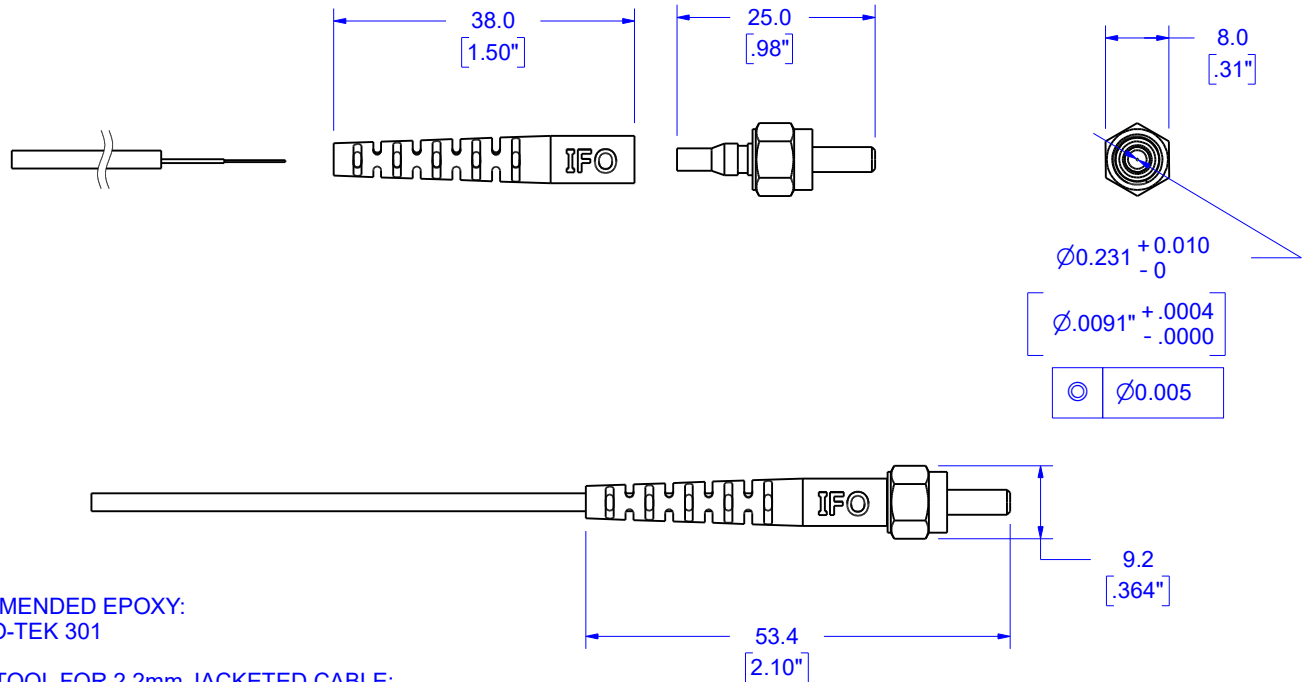

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	51 0521
	MATERIAL	
DIMENSIONS ARE FOR REFERENCE ONLY NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT	FINISH	PASSIVATED
	DRAWN BY	S. Ahmed
	DATE	7/26/2023
	CHECKED BY	A. Reyes
	DATE	7/26/2023

Industrial Fiber Optics TEMPE, AZ 85281			
NAME 231µm/ 2.2mm SMA			
SIZE A	SCALE 1:1	DOCUMENT NUMBER 51 0521	REV B
DO NOT SCALE DRAWING		1 OF 1	



METRIC