

4

3

2


1



REVISIONS					
REV.	DESCRIPTION	ECO	DATE	DWN	APVD
00	Prerelease		9/22/2023	SA	BB
A	Initial release		10/2/2023	SA	BB

B

B

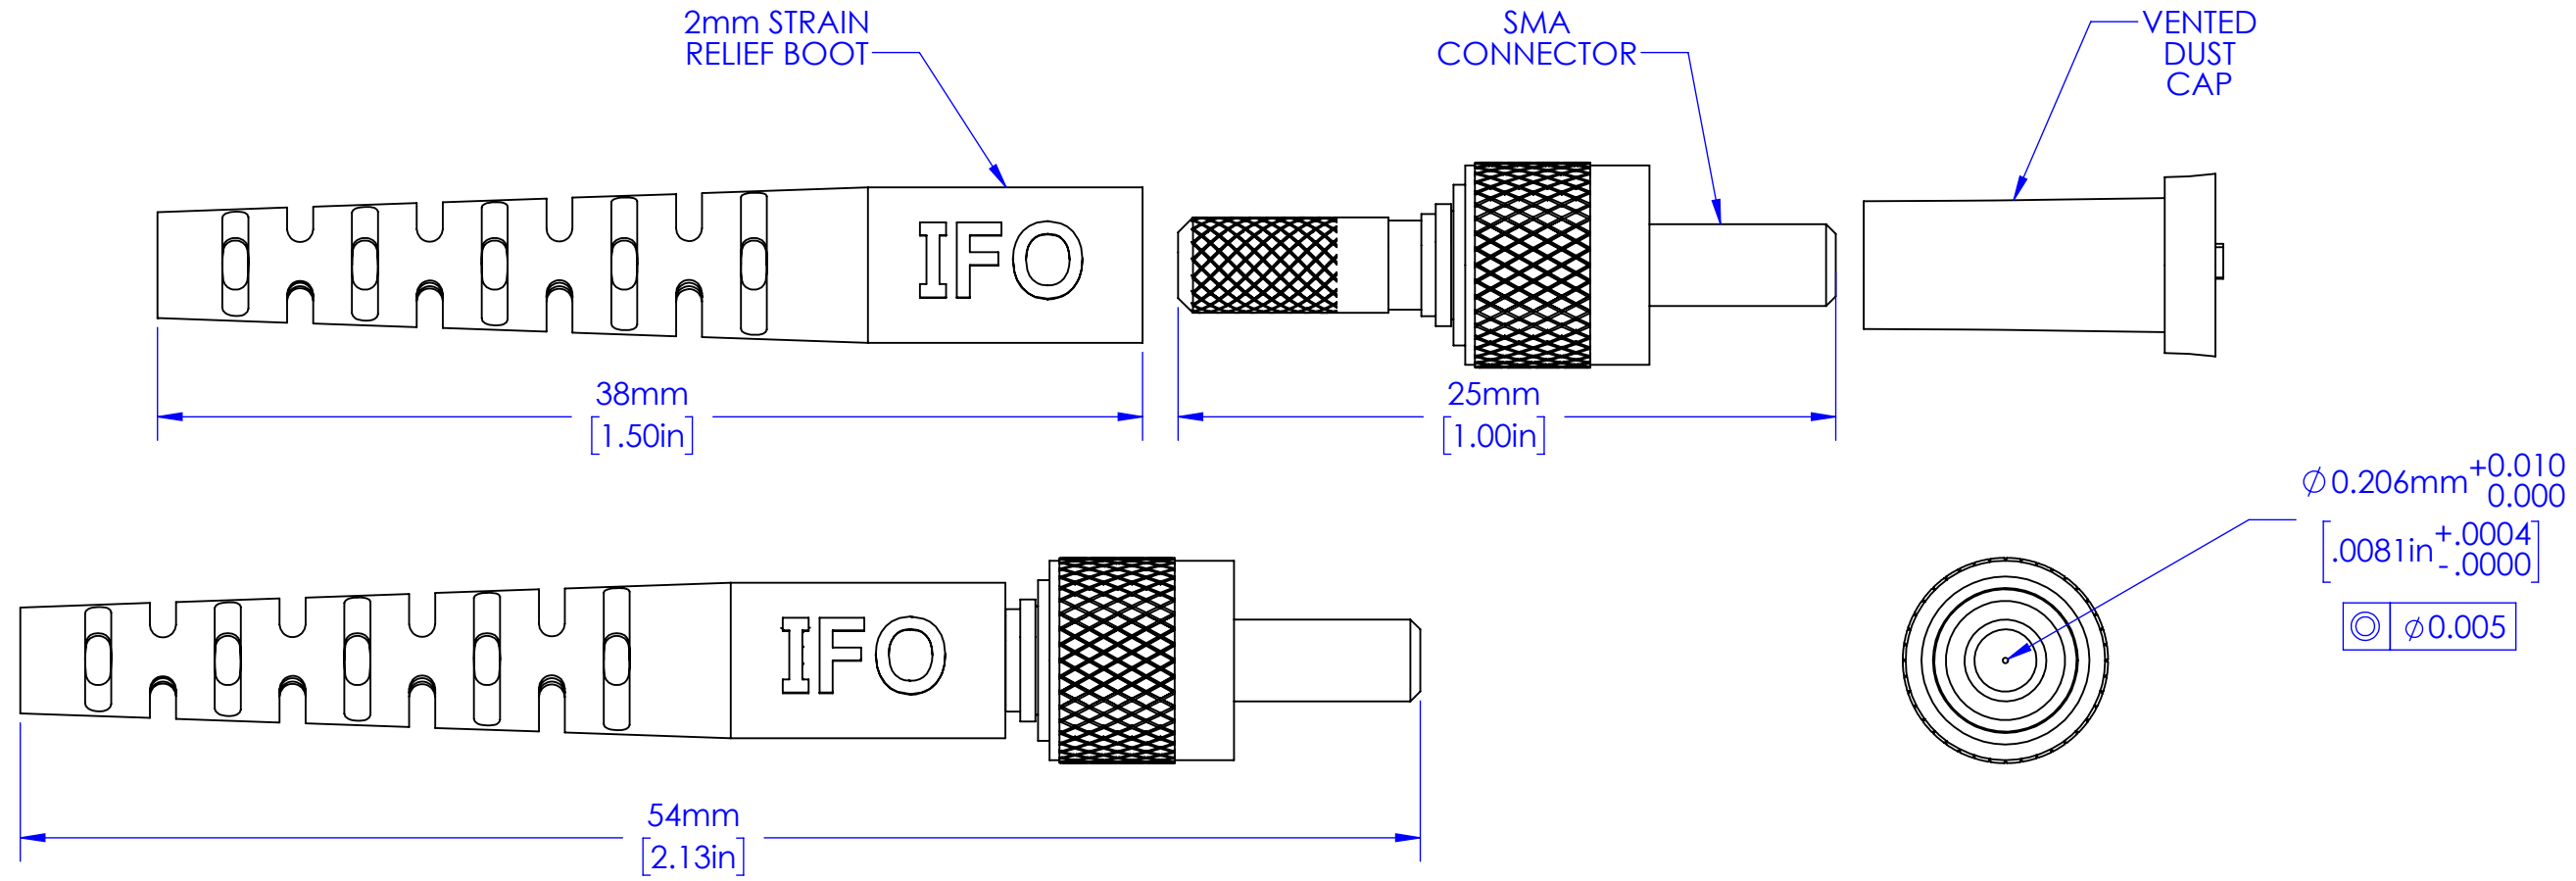

A

A

- NOTES:**
- SUITABLE FOR 175/190 GLASS OPTICAL FIBER.
  - RoHS COMPLIANT.
  - 40°C TO +85°C OPERATING TEMPERATURE.
  - IEC 61754-22 COMPATIBLE.
  - STAINLESS STEEL FERRULE AND NUT.
  - MAXIMUM NUT TORQUE: 0.9N-m [8in-lbs].

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INDUSTRIAL FIBER OPTICS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL FIBER OPTICS IS PROHIBITED.

DIMENSIONS	MILLIMETERS [IN]	UNLESS OTHERWISE SPECIFIED:	NAME	DATE	INDUSTRIAL FIBER OPTICS TEMPE, AZ 85281			
0 PLC:	±1.0	Customer:	DRAWN	S. Ahmed 9/22/23	<b>TITLE:</b> 206m Knurled Connector; 2mm Boot			
1 PLC:	±0.3		CHECKED	B. Bidwell 9/25/23				
2 PLC:	±0.13		COMMENTS:					
3 PLC:	±0.025	INTERPRET GEOMETRIC TOLERANCING PER:ASME Y14.5-2009	DIMENSIONS ARE FOR REFERENCE ONLY. NO TOLERANCES MAY BE IMPLIED FROM THIS DOCUMENT.		<b>SIZE</b> <b>DWG. NO.</b> <b>B</b> 905-0206-0010			
4 PLC:	±0.0127	MATERIAL					<b>REV</b> <b>A</b>	
ANGLE:	±1/2	FINISH						
APPLICATION		DO NOT SCALE DRAWING						

4

3

2

1