

4






3

2

1

- NOTES:
- 1. INDUSTRY STANDARD HOLE PLACEMENT.
 - 2. REQUIRES ADAPTER RING FOR TO-- PACKAGES.

REVISIONS					
REV.	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		5/13/2024	DH	MY
B	Dimensions account for thickness of plating		5/20/2024	SA	MY

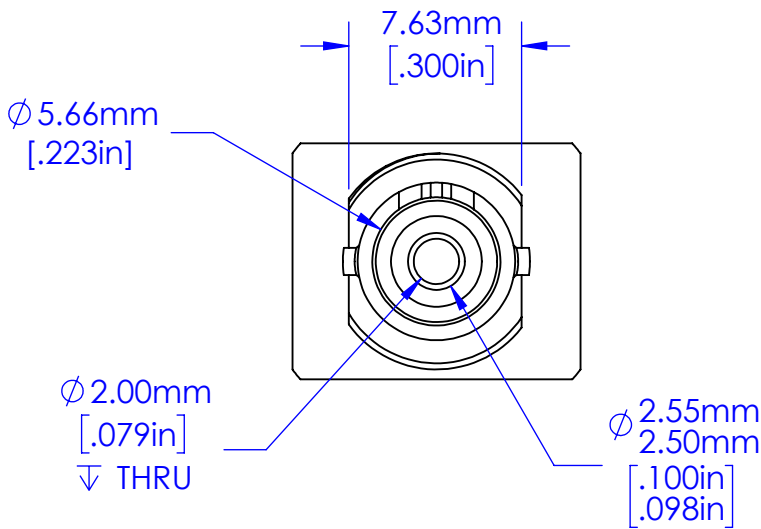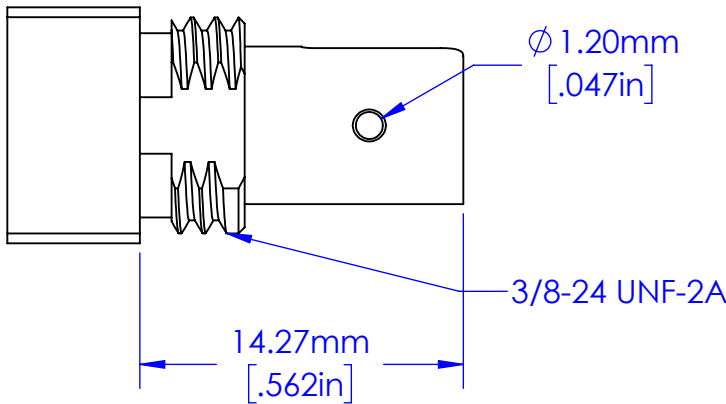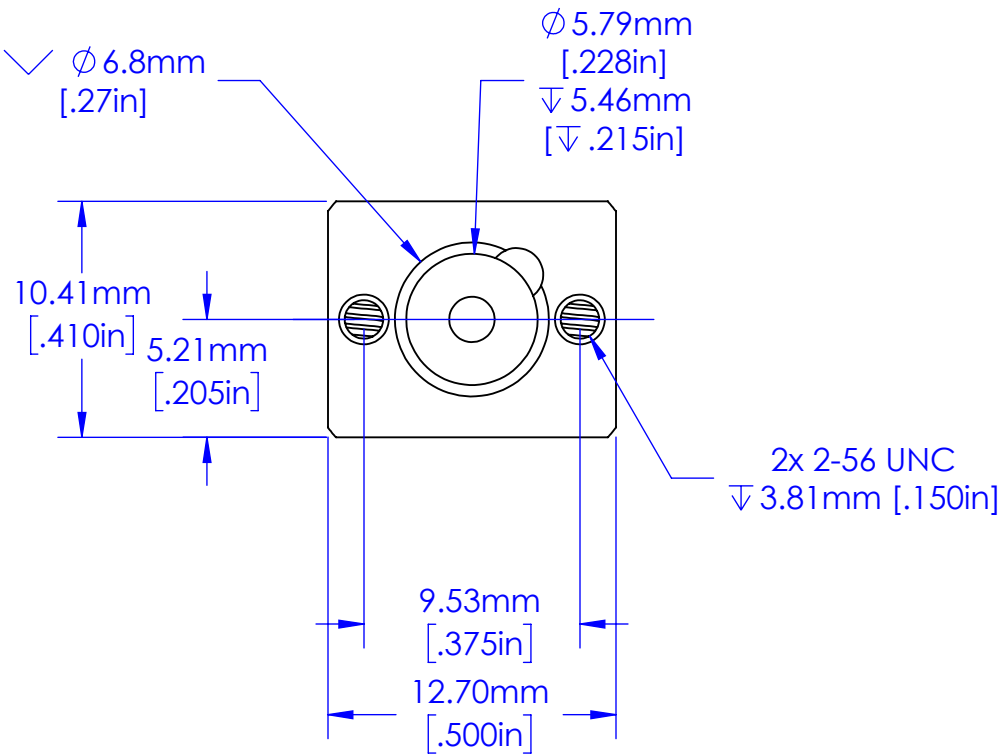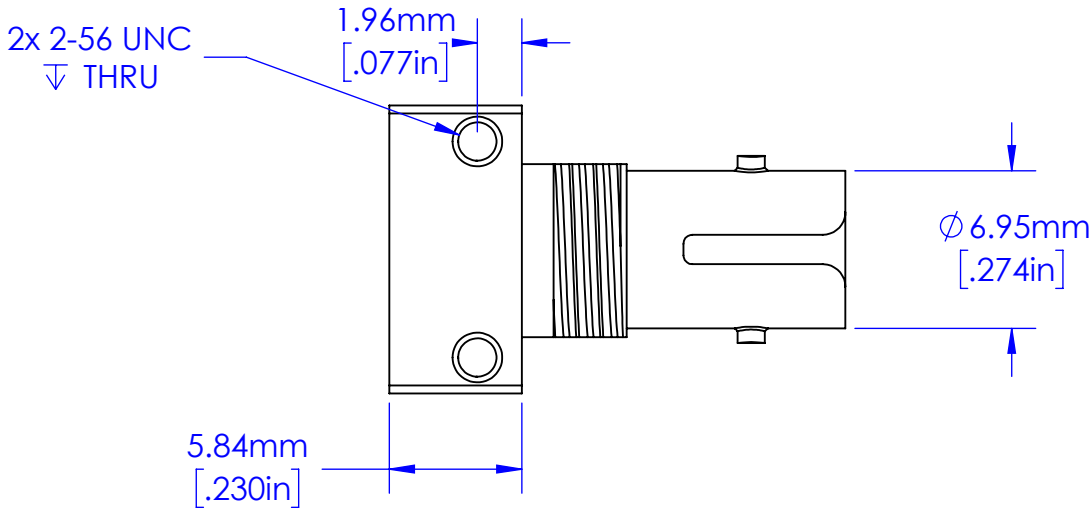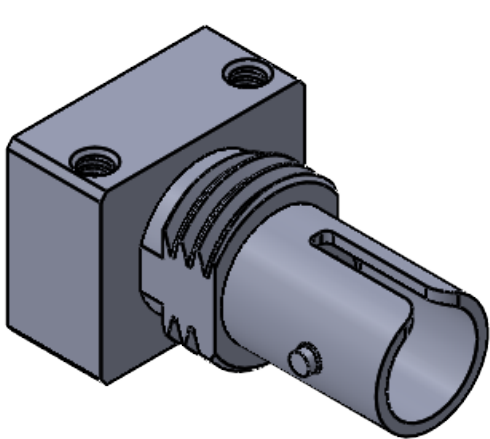

SURFACE 3.2/
TEXTURE: √

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
INDUSTRIAL FIBER OPTICS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
INDUSTRIAL FIBER OPTICS IS PROHIBITED.

DIMENSIONS		MILLIMETERS [IN]	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	INDUSTRIAL FIBER OPTICS	
0 PLC:		± 1.0	Customer:		DRAWN	S. Ahmed	5/20/24	TEMPE, AZ 85281
1 PLC:		± 0.3			CHECKED	M. Yee	5/22/24	TITLE:
2 PLC:		± 0.13			COMMENTS:			ST Device Mount
3 PLC:		± 0.025	INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		REMOVE BURRS AND SHARP EDGES BREAK EDGES 0.13mm MAX FLATNESS 0.13mm PER mm ALL DIMENSIONS AFTER FINISH			
4 PLC:		± 0.0127	MATERIAL		Aluminum 6061-T6			SIZE DWG. NO.
ANGLE:		± 1/2	FINISH		Electroless Nickel Plating			REV
APPLICATION			DO NOT SCALE DRAWING					B 42 0642 B
								SCALE: 5:1 WEIGHT: SHEET 2 OF 2

4

3

2

1