

# Specifications for Plastic Optical Fiber


## Multicore POF™ MCJ-1000

Issued on : April 8, 2020

Issued by : Asahi Kasei Corporation  
Plastic Optical Fiber  
Marketing & Development Gr

1, STRUCTURE

ITEM	UNIT	Specifications
Core Material		PMMA
Clad Material		Fluorinated Polymer
Core reflective index		1.49
Reflective index Profile		Step index
Fiber Diameter	μm	1000 ± 60
Core Number		1300
NA		0.5
Jacket Material		PE
Jacket Diameter	μm	2200 ± 70
Jacket Color		Black
Approx. weight	g/m	3.6

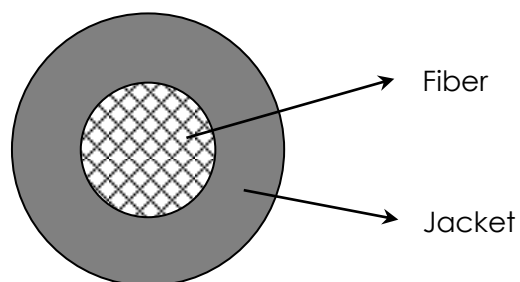

## 2, PROPERTIES

ITEM	UNIT	Specifications	
Storage Temperature Range	°C	-55 ~ 60	
Application Temperature Range	°C	-55 ~ 60	
Attenuation	dB/m	≤ 0.6	*1
Tensile Strength at Break Point	N	≥ 80	*2
Minimum Bending Radius	mm	1	*3

### Sample conditions

Temperature: T = 23°C  
Humidity: RH = 50%  
Storage time: t = 200h

\*1 : Light Source : LED (Peak Wavelength = 657nm), 20-2m Cut-back Method

\*2 : Interval between grippers = 100 mm, Tensile Speed = 100mm/min

\*3 : L = 2m, 90 degree bending at the middle of fiber

Light Source : LED (Peak Wavelength = 657nm)

Transmission Rate ≥ 90%

### 3, RoHS certification

The product does not contain RoHS 2 hazardous substances, Cadmium, Lead, Mercury, Chromium (VI), PBB, PBDE, DIBP, DEHP, DBP and BBP intentionally.